




Product Data Sheet

UNICLASS L7315
Cl/Sfb (52.6)
October 2012

VX-F080 Circular grating for Vinyl stainless steel

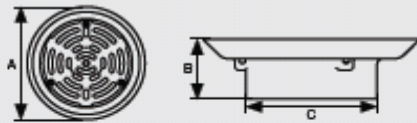

150mm Circular Grating (NPSM threaded or Direct Fit)

GEN code	Material	FIT	Finish		A	B	C	WTKG	Grating free area (cm ²)
VX-F080	Stainless Steel	NPSM	Standard 227112	Polished 234197	170	53	110	2.1	72
VX-F080	Stainless Steel	Direct Fit	Standard 233435	Polished 234198	170	53	110	2.1	72

General Description

150mm circular stainless steel grating for vinyl floors with a NPSM thread or plain spigot for direct fit. Supplied in a standard finish or in a polished finish to order.

Technical Specification

Material: Stainless steel
Loading: K3

Compatible Items

NPSM grating: All cast iron Floor gullies VX-F200, VX-F210, VX-F220, VX-F230
Raising pieces VX-F350

Direct fit grating: Pipework 110mm OD
Ensign, EEZI-FIT, Timesaver 416, other materials 110mm OD
Timesaver 437 using a TD02 stepped coupling

Options
Removable bottle trap VX-F400
Filter basket VX-F410
Accessories Oval /circular funnels VX-F305, VX-F300
Security screws (bag of 4) VX-F420

Flowrate@ 20mm head

Fitted to medium sump gully, sumpless gully and P Trap = 2.0 L/s
Fitted to S Trap = 1.7 L/s



Saint Gobain PAM
Lows Lane, Stanton-by-Dale
Ilkeston, Derbyshire, DE7 4QU
Sales : 0115 930 0630

Technical T:01952 262 529 F: 01952 262 592
E: technical.soildrain.uk.pam@saint-gobain.com